SENSORS & SOFTWARE





GNSS for GPR Systems

Use high-accuracy GNSS with your GPR to precisely locate & map underground assets.



Accurate Positioning is Critical for GPR Surveys

Use your GPR to accurately position buried assets, determine the location of detected subsurface objects, identify areas to avoid digging and record the locations of all assets.

Sensors & Software's SG for GPR accessory bundles provide an out-of-the-box solution to integrate high-accuracy GNSS positioning into your GPR data. Every SG package includes a pre-configured Juniper Geode[™] with connectivity, setup, and battery management all taken care of at the system level, making it easy to incorporate precise positioning into your GPR workflow.

	SG Package includes	Optional RTK Upgrade adds			
Features	 Multi-frequency (L1, L2, L5) Multi-constellation including GPS, GLONASS, BeiDou, GALILEO Galileo High Accuracy Service (GALHAS) support 				
Accuracy	30cm RMS ¹ 1cm RMS ¹ with RTK 20cm (with GALHAS) ¹ correction service ²				
Correction services	Local SBAS correction (free) • WAAS in North America • EGNOS in Europe • GAGAN for South Asia • MSAS for East Asia	 Ground-based, NTRIP cellular correction services, available free of charge in some areas, or through paid subscriptions² The satellite-based correction service, ATLAS[®], provided by Juniper[®] Systems² For a list of Geode- compatible RTK correction services available in your region, visit junipersys.com 			
Configuration	Pre-configured, ready to use out of the box	NTRIP or satellite correction must be configured in Geode App (instructions provided)			
Custom cable	Noise-suppressing power cable:Removes interference with GPR signalsPowers the GNSS directly from the GPR battery				
Data integration	GNSS positioning data is integrated directly into GPR data for powerful locating and mapping advantages in the field and post-processing.				
System Compatibility	LMX°, NOGGIN°, pulseEKKO°, SPIDAR°				



1. Additional specifications available at www.sensoft.ca/geode-gnss 2. Subscription to correction service is not included.




Benefits of High Accuracy GNSS

Enhanced in-field GPR visualization



Easily track linear targets.

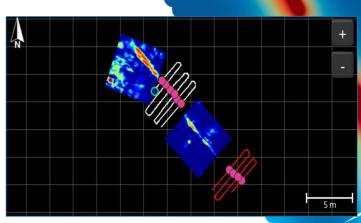

See MapView images with geo-referenced depth slices, survey path, field interpretations & flags.

Map your results with automatic GPR outputs

1	Α	В	С	D	E	F
1	Tool	Position (m)	Depth (m)	Latitude	Longitude	GPS-Elevation
2	Point	0.72	0.18	38.8345202	-9.1821844	16.63
3	Point	0.83	0.7	38.8345201	-9.1821826	16.6
4	Point	1.12	0.75	38.8345187	-9.1821798	16.59




Import CSV file of field interpretations from utilities and other targets, into GIS, Google Maps & other mapping software.




Plot KMZ files with GPR survey path, field interpretations & flags in 3rd-party software such as Google Earth[™].

Use EKKO_Project[™] GPR analysis software to export results in geo-referenced formats

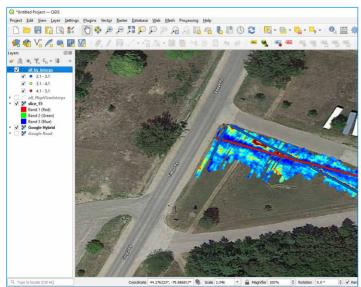


Generate depth slices to assist with data interpretation and export as GeoTIFF files into GIS software.





Add MapView interpretations and additional point interpretations to GPR data to augment CSV, KMZ, DXF files.



Create 3D plots of interpretations.

SENSORS & SOFTWARE from RADIODETECTION



Our Mission

Provide best in class equipment and solutions, to prevent damage to critical infrastructure, manage assets and protect lives.

Our Vision

To be the world's leader in the management of critical infrastructure and utilities.

Our Locations



USA Raymond, ME Kearneysville, WV

Canada Mississauga, ON **Europe** United Kingdom **HQ** France Germany The Netherlands



Asia Pacific India Hong Kong Australia



Copyright © 2025 Radiodetection Ltd. All rights reserved. Radiodetection is a subsidiary of SPX Technologies, Inc. Sensors & Software, LMX, NOGGIN, pulseEKKO, SPIDAR, EKKO_Project and MAP It Your Way are either trademarks or registered trademarks of Radiodetection in the United States and / or other countries. Google Earth is a trademark of Google LLC. Juniper Systems is a registered trademark of Juniper Systems, Inc. Geode is a recognized trademark of Juniper Systems, Inc. Atlas is a trademark of Hemisphere GNSS Inc. Due to a policy of continued development, we reserve the right to alter or amend any published specification without notice. This document may not be copied, reproduced, transmitted, modified or used, in whole or in part, without the prior written consent of Radiodetection Ltd.

90/SG-GPR-TS-ENG/01



